



AUTOMATIC VOLTAGE REGULATOR

UPS

AVR

INVERTER

PROTECTOR

CHARGER



WNR & SWNR Series / Relay Type

Model	WNR-500VA	WNR-1000VA	WNR-1500VA	WNR-2000VA	WNR-3000VA	WNR-5000VA	WNR-8000VA	WNR-10000VA
	SWNR-500VA	SWNR-1000VA	SWNR-1500VA	SWNR-2000VA	SWNR-3000VA	SWNR-5000VA	SWNR-8000VA	SWNR-10000VA
Power	300W	600W	900W	1200W	1800W	3000W	4800W	6000W
Technology	Zero Cross Switching Technology & Digital CPU Control Circuit & Delay Countdown System & Metal Cabinet							
Transformer	Toroidal Transformer							
Input Voltage	100-260Vac/140-260Vac, 50/60Hz							
Output Voltage	220V/230V, ±10% or 8%							
Efficiency	98%							
Phase	Single Phase							
Display	WNR Series: Classical Dual LED Digital Display				SWNR Series: New Integrated LED Digital Display			
Cooling	Smart Fan (Automatic Startup at 65°C)							
Protection	High Voltage/Low Voltage (Optional)/Overheat/Overload/Short Circuit/6s or 180s Output Delay							
Certification	CE (LVD+EMC)							
Unit Weight/N.W.	2.8 kgs	3.5 kgs	4.3 kgs	4.7 kgs	8.5 kgs	10.2 kgs	14.8 kgs	16.9 kgs
Giftbox Size (mm)	283*225*182	283*225*182	335*225*182	335*225*182	430*222*198	430*222*198	435*290*228	435*290*228
Carton Size (mm)	465*293*385 (4)	465*293*385 (4)	460*420*417 (4)	460*420*417 (4)	N/A	N/A	N/A	N/A



WNR Series
Optional Display




SWNR-500VA/1000VA

SWNR-1500VA/2000VA




SWNR-3000VA

SWNR-5000VA

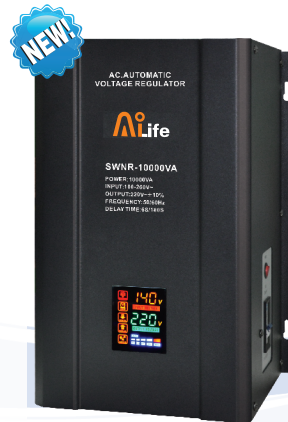


SWNR-8000VA



SWNR-10000VA

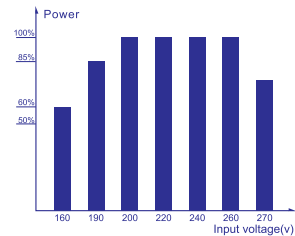


Loading capability diagram

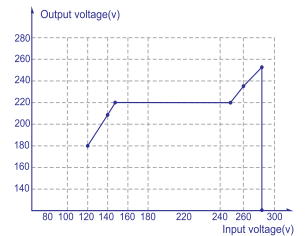

Input/output voltage diagram



WNR/SWNR-500VA
WNR/SWNR-1000VA
WNR/SWNR-1500VA
WNR/SWNR-2000VA



WNR/SWNR-3000VA
WNR/SWNR-5000VA
WNR/SWNR-8000VA
WNR/SWNR-10000VA